


**LEARN HOW TO OPERATE A BOREHOLE PUMP**

# **A BOREHOLE PUMP OPERATOR'S HANDBOOK**



## Acknowledgements

We gratefully acknowledge the funding and support for the programme entitled Adaptive Response and Local Scale Adaptation for improving water security and increasing resilience to climate change in selected communities in Giyani, Limpopo. The programme is funded by the Government of Flanders, managed by the Water Research Commission and implemented by Tsogang Water and Sanitation, Association for Water and Rural Development (AWARD), University of the Western Cape (UWC) and the WRC's TTO Enterprise Development.



## Disclaimer

The content of this handbook does not necessarily reflect the views and policies of the WRC or its partners, nor does mention of trade names or commercial products constitute endorsement or recommendation for use. The WRC and partners cannot be held liable in any way for the damage, personal harm or any breakdowns stemming from actions related to the contents of this handbook.

The Giyani Local Scale Climate Resilience Programme (GLSCR) aims to develop and implement activities that will research, develop and demonstrate climate adaptive responses and solutions for optimising water utilisation in drought-stricken areas.

The programme will focus on the Greater Giyani Municipal area within the Mopani district and aims to impact an estimated 5000 beneficiaries over a three-year period in terms of water utilisation, improved water mix, and socio-economic opportunities as responses to climate adaptation.

A 2019 WRC study on droughts and adaptation strategies has highlighted risks to reduced productivity, livelihoods and food security, and an increase in vector and water-borne diseases in communities such as Giyani. Ultimately, climate change impacts on water resources in the Giyani area cannot be underestimated.

The programme has three key areas that will support improving local scale adaptation and resilience in Giyani.

They are:

- 1) a strengthened enabling environment whereby local authorities, institutions, communities, traditional authorities and market players are mobilised to improve climate resilience and water utilisation;*
- 2) improved energy, ground and surface water solutions developed with communities to optimise and diversify water sources;*
- 3) activities that support livelihoods and local economic development opportunities.*

The programme will cover a spectrum of rural and rural residential areas in Giyani, working closely with the Mopani District Municipality and the Greater Giyani Local Municipality. Implementation partners include Tsogang Water and Sanitation as the lead on water projects and infrastructure; Association for Water and Rural Development (AWARD) in support of capacity development and stakeholder engagement, University of the Western Cape (UWC) as the water and energy technical partner and the WRC's TTO Enterprise Development arm on social enterprise development supporting local economic development projects.







# **A BOREHOLE PUMP OPERATOR'S HANDBOOK**

**A handbook for operators  
of community managed boreholes in Giyani villages**



# ABOUT THIS HANDBOOK

**Operating a borehole is not as simple as it may seem. It is not simply about switching on the power or starting the generator then waiting for water to reach our homes.**

There is a lot of planning, preparation and management that is required. When it comes to operating a borehole that is shared by a number of homesteads in a village, the operation of the borehole becomes a social issue. This means that there is co-ordination required, sharing of responsibilities, taking care of maintenance, ensuring there is adequate security and that the use of the water is well managed. Without these things the water supply will collapse and homes will be without water.



## Who is the handbook for?

This handbook is meant for borehole operators or any person responsible for operating a community borehole pump.

## What does the handbook contain?

In this handbook we share important information on the operation of community operated boreholes. We share important maintenance information, guide the borehole operators with daily duties, explain how and why certain tasks are essential.

The handbook is divided into TASKS and each task is broken down into the What? Why? When? Who? And How? This means that the operator can understand the details of each task fully. At the end of each task we provide recommendations for the operator on how to complete the tasks more successfully or provide alternative methods, if there are any.

**“Community borehole operation is a social issue”**

## How to use the handbook?

This handbook should be used along with the training that will be given by the project team. After that the Handbook should be kept by the Pump Operator or stored along with the pump in the pump house, if it is secure.



# TASK I

## COLLECTING INFORMATION ABOUT YOUR BOREHOLE

**Before you can start to manage your borehole, you need to know more about it. Where it is, how deep it is, how old it is, how much water it can pump in both the dry and wet seasons, how powerful the pump is, how many hours it can safely be pumped for and so on... these are all essential for the pump operator not to damage or deplete the groundwater. In order to make sure that you do not expose your borehole to any risks you need to have some basic information about it.**

**Because not all boreholes are the same!**

### WHY?

#### **Why do you need basic information about your borehole?**

Having a record of your borehole information allows us to make sure that the borehole is not over-used or damaged through incorrect usage. Also, if maintenance is required we are able to move quickly to order parts and know what kind of borehole pump we are dealing with. Because borehole repair is costly and time consuming the more information we have the quicker and cheaper the repair process will be.



**"A non-functional borehole is of no use to anyone."**

### WHO?

#### **Who collects the basic borehole information?**

Collecting basic borehole information is usually a once-off exercise that is done when the borehole and pump are installed. But it might be necessary to update the basic information if the borehole is repaired, a new pump installed and changes made. It is conducted by the pump operator supervisor (Technical staff of the Water Service Provider or District Municipality).

(The borehole drilling company will often provide the basic information)



# WHAT?

## 1. Record the exact position of the borehole

There is a number of ways to do this, some are more accurate than others. However we do it, it is important to give an exact location of your borehole because many villages have more than one borehole. Without knowing exactly where boreholes are makes it difficult for a maintenance team to locate them when there is a need. The exact location is recorded by taking co-ordinates with a GPS or a smart phone



## 2. Record the amount (yield) of water that comes from your borehole

This can be done with a stopwatch by measuring the time required to fill a container of known volume, for example a 2 L plastic bottle, a 5 L bucket, a 10 L canister or similar. It is essential to know how much water your borehole can provide. If you pump more than it can provide there is a danger of damming the pump and also the supply of water underground. This is one of the most important pieces of information that you need as a borehole operator so that you do not OVER PUMP your borehole.



## 3. Keep a record of the drilling process and installation

This is called a drilling log and contains all the information that the drilling company provides when they install the borehole. In the drilling log is usually the water strike depth (the depth underground at which the water is found) and yield (litres that can be pumped per second and for how long), static water level, water quality, pumping tests and hydraulic properties. See the section on How? below for more details.

The log will also contain all the technical information about the drilling process, nature of the rocks and soils underground, materials installed and so on. If there is a problem with the borehole, another drilling company will request the drilling log to make sure that they can repair it properly.







## How is the basic borehole information collected?

The information on the borehole is usually collected according to set categories and criteria.

These are:

- Installation date and type
- Drillers details
- Borehole depth
- Diameter of hole
- Casing and screen details
- Riser main material and diameter
- Depth to pump (m)
- Type of power supply
- Type of pump
- Pump power (kW)
- Serial number of the pump
- Pump supplier detail
- Electrical meter number (If applicable)
- Dipper tube depth and nominal diameter (If applicable)
- Water meter make, type and number

Set up your own Basic Borehole Information sheet in your workbook using the categories above.

## RECOMMENDATIONS

- Record keeping is essential, without it the borehole cannot be managed!
- The pump operator and water committee should have a record of the basic borehole information.
- A copy of all information should be stored in the offices of the Water Services Authority (District Municipality)



# BASIC INFORMATION SHEET

Use the page below for record keeping of all the important information about your Borehole.

# TASK 2

## WORKMANSHIP QUALITY CHECKLIST

It is an unfortunate reality that that all installations meet the necessary standards, leaving communities with poorly functioning boreholes (borehole collapsing, drying out or pump breakdowns) shortly after installation. It is therefore the responsibility of water committees to take ownership of the installation process and track the quality of workmanship for themselves. This checklist will help you to do that.

### WHAT?

#### What is the Workmanship Quality checklist?

It is a checklist of items used to determine that standards are met and that a good job has been done in installing the borehole. The two purposes are:

- To verify the quality of workmanship for groundwater pumping installation.
- To help assess if the quality of installation adheres to best practices, safety requirements and overall installation sustainability

### WHO?

#### Who uses the workmanship quality checklist to check on quality?

**The pump operator:** a person on the ground responsible for the day-to-day operation and maintenance of the system (e.g. a volunteer pump operator, a farmer or a community Water Committee member)

**The pump operator supervisor:** a technical person that is responsible to supervise the pump operator and support monitoring activities (e.g. staff of the Water Service Provider or District Municipality)

### WHY?

#### Why is it important to do a quality checklist?

It is important for a community to know that standards are met when they receive a new borehole. Without keeping a check on the installation process communities might be left with a borehole that does not function due to poor workmanship.

#### How do you complete a workmanship quality checklist?

A workmanship quality checklist consists of a number of questions in a table. The answer to each question is either Yes or No. There is also an option to show how further action is taken if the answer is No. (See Data Sheet in your folder for this Checklist) . Use the data sheet provided to record your responses and to track the quality of workmanship. Note that this checklist makes provision for systems that are solar powered.



# MAINTENANCE CHECKLIST

Effective solar maintenance plays a pivotal role in safeguarding the reliability of your groundwater pumping system. To achieve this, consider the following key activities immediately after installation, as adapted from FAO and GIZ (2021):

**1. Equipment Manuals and Documentation:** Ensure that operation and maintenance manuals, provided by the manufacturer or supplier, are readily available. These documents contain crucial instructions for system operation, maintenance, troubleshooting, and warranty information.

**2. Regular Field Inspections:** Especially in the initial months of operation, conduct regular field inspections to identify any potential issues or areas requiring attention.

**3. Designate a Responsible Maintenance Person:** Appoint an individual responsible for routine maintenance tasks. This person should be familiar with the system's components and maintenance requirements.

**4. Warranty Considerations:** Avoid attempting to repair defective components on your own, as this can void the warranty on the equipment. Instead, rely on authorized service providers for repairs.

Common installation mistakes that can lead to problems later. Use this space below to record any relevant information and maintenance notes.

# TASK 3


## MEASURING GROUNDWATER ABSTRACTION

When we take something away from a particular place we call it extraction. In mathematics we call a similar process subtraction. When we remove water from below the earth's surface we call it abstraction. It is very important to know how much water we are removing from below the earth's surface because there is not an unlimited supply. If we remove too much water we call it unsustainable with the result that our boreholes dry up leaving us without water until the rains return.

### WHAT?

#### What is groundwater abstraction?

Groundwater is the water present beneath Earth's surface in rock and soil pore spaces and in the fractures of rock formations. About 30 percent of all readily available freshwater in the world is groundwater. An aquifer is an area rock formation that carries water and that can yield a usable quantity of water. The depth at which soil pore spaces or fractures become completely filled with water is called the water table. (Wikipedia)

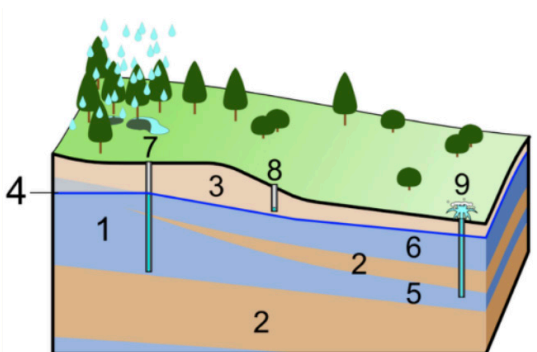

An illustration showing groundwater in *aquifers* (in blue 1, 5 & 6) below the *water table* (4), and three different *wells* (7, 8 & 9) dug to reach it.

Source | Wikipedia

### WHO?

#### Who is responsible for measuring groundwater abstraction?

Groundwater abstraction volumes or rates should be recorded by the Pump Operator, a person on the ground responsible for the day-to-day operation and maintenance of the system (e.g. volunteer operator, a farmer or a community Water Committee member).

### WHY?

#### Why do one need to measure groundwater abstraction?

The more we use groundwater the lower the water level or water table becomes. After switching the pump off, the groundwater level takes some time to recover to the original (static) level. If we do not keep a good record of how much water we are taking from the aquifer we can end up using more water than is being replaced resulting in our boreholes drying.



## How do we measure groundwater abstraction?

Abstraction volumes are usually measured with water (Volume) meters in litres or m<sup>3</sup> per day. This can also be calculated from the number of hours pumped per day if the pumping rate is known. Pumping rate can be measured manually with a container of known volume and a stop-watch. Details of these techniques will be demonstrated in the training sessions.



## How does one record the groundwater abstraction measurements?

Routine/regular measurements using a water meter need to be written down and stored as records so that we can compare the functioning of the borehole over time. Date, time and abstraction volume can be written down on specific sheets (logbooks) that need to be stored safely. (see data sheet xxx)

You will be given an opportunity to fill in a data sheet recording abstraction during the training session. The smaller clocks on the water meter show smaller amounts:

**X 0.1 clock measures 100 litre intervals and a full revolution of the clock is 1 kilolitre.**

**X 0.01 clock measures 10 litre intervals and a full revolution of the clock equals 100 litres.**

**1 litre intervals can be read from the small ticks of the X 0.01 clock.**

It is sufficient to record abstraction in m<sup>3</sup> in the log-sheet.

## RECOMMENDATIONS

### Water meters must be protected!

**They are sensitive and expensive.**

Water meters can easily be clogged if the water flowing through them contains sand or other large particles. An in-line strainer can protect the water meter from clogging. Water meters and in-line strainers require regular checking and maintenance as part of the routine operations and maintenance. The pump operator should backwash the strainer or filter regularly. Besides a water meter, it is highly beneficial to have a pressure gauge installed in the pipeline to monitor whether water at sufficient pressure is delivered to the users. A pressure gauge should be installed by the supplier and readings recorded by the pump operator.

# TASK 4

## MONITORING GROUNDWATER LEVELS

Groundwater is a highly useful resource and often commonly used in rural areas of Giyani. Most land areas on earth have some form of water underground in aquifers. The groundwater depth in aquifers varies from place to place, sometimes significantly. In some cases, groundwater in aquifers is rapidly being depleted by the human population. When we overuse our boreholes they become dry until they can be recharged by rainfall.


## WHAT?

### What is the groundwater level or water table?

We will deal with groundwater levels and how we measure them in this task (see figure xxx).


The water table is the upper surface of the zone where the soil spaces contains water (called the zone of saturation). It is the level/depth at which we strike water when we dig a borehole or well. In simple terms it is explained as the depth below which the ground is saturated with water.

The water table may vary due to seasonal changes and is especially dependant on rainfall. Springs, rivers and lakes occur when the water table reaches the surface and groundwater feeds them. When the groundwater table drops, rivers and lakes feed groundwater and we might find that they dry up.

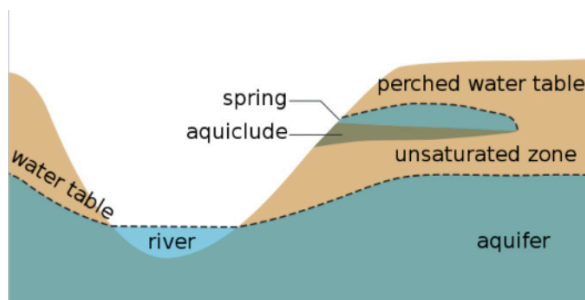

Cross section showing the water table varying with surface topography as well as a perched water table.

Source / Wikipedia

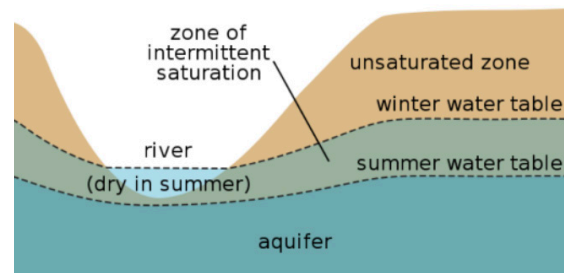

Seasonal fluctuations in the water table - during the dry season, river beds may dry up.

Source / Wikipedia



# How does one measure groundwater levels?

The measurement of groundwater depth is taken with a Dip Meter consisting of a tape measure that releases a light or noise when it is lowered in the borehole to the water table. Groundwater depth is measured on rest water levels, after allowing the groundwater table to recover after pumping. rest water levels, after allowing the groundwater table to recover after pumping.



## WHY?

### Why do we monitor groundwater levels?

When we over use our boreholes there is a risk to our water supply. Over-use, over-abstraction or overdraft, as it is called, can cause major problems for village water security. The most important issue for people is a lowering of the water table beyond the reach of existing wells. This means that we need deeper boreholes or we need to wait for rain.

The groundwater depth should be measured regularly to establish whether the aquifer is being over-pumped and to establish an efficient pumping rate for individual boreholes. This is one of the most important tasks of a borehole operator and essential for managing groundwater supply.



## How often do you measure groundwater levels?

It must be measured on a routine basis, but before switching the pump on, and after the pump has rested for some hours. The measurement must be recorded in a datasheet and stored for comparison. Information that is not written down is not useful for future use. Date, time and groundwater depth measurements should be written down on specific sheets (logbooks) that need to be stored safely. This information is useful for professional hydrogeologists to assist you with sustainable aquifer use in your village. The Pump Operator needs to follow these steps when measuring groundwater levels:

The pump operator needs to record the following measurements:

- Date, Time and Groundwater depth measurement.
- See the data sheet for entering measurements for long-term records.

## WHO?

### Who should measure groundwater levels?

Groundwater depth monitoring is done by the Pump Operator. This is a responsible duty and not everyone should be allowed to access the borehole without permission.

## GROUNDWATER LEVEL DATA SHEET

Once your solar-powered groundwater pumping system has been installed and accepted, it's time to shift your focus towards ensuring its longevity, efficiency, and consistent performance. A "Maintenance Checklist" is a fundamental tool for systematically monitoring and maintaining your solar-powered system. While solar maintenance doesn't require specialized skills, it does demand regular attention to preempt potential issues, respond promptly to service needs, and safeguard the system's efficiency and lifespan. Proper documentation of maintenance activities is essential for tracking the system's health over time. Use this space below to record any relevant data and groundwater level notes.



# RECOMMENDATIONS

Monitoring of groundwater levels with data loggers is becoming more and more common. These are pieces of electronic equipment that can be programmed to record readings at set intervals without manually having to be present.

The information can be retrieved from the data logger when it is convenient. Such monitoring provides data of groundwater levels at a pre-programmed frequency (usually 30 min or 1 h). This allows to monitor groundwater abstraction, recovery and recharge events – information that is important for understanding the aquifer system.

Loggers cost around R5 000, however a laptop for downloading data with the processing software installed is also essential. Loggers are usually installed in key monitoring boreholes only. Although costly the use of dataloggers should be planned as a network activity between villages so that costs can be kept to a minimum.




Data Logger





# TASK 5

## MEASUREMENT OF RAINFALL

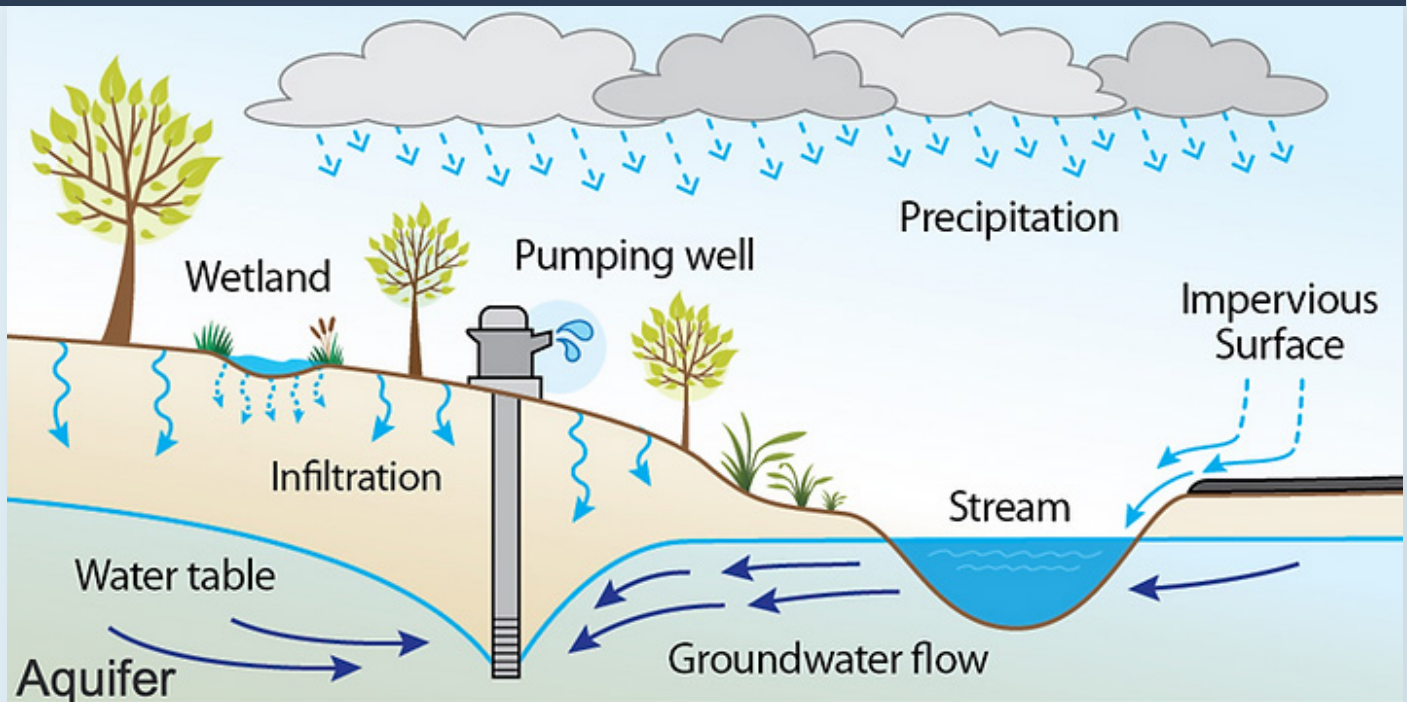

Source | <https://www.tortolitaalliance.com/post/>

## WHAT?

### What is the purpose of measuring rainfall for borehole management?

Most of the water underground water comes from rainfall. As we use groundwater it gets replenished by rainfall. We call this process groundwater recharge (see figure xxx) With low rainfall there is almost no groundwater recharge. Recharge occurs only occasionally during events of heavy or persistent rainfall.

By measuring the rainfall we can get an idea of how quickly the groundwater in our area is being recharge. This is important for use to know so that we can regulate our use of groundwater.

## WHY?

### Why is it important to keep long-term records of rainfall?

Since the process of groundwater recharge is slow, we need to keep a long term record of rainfall so that we can understand how the recharge process may be occurring. Historic records in rural areas are scarce which means that there is an increased risk of over use or depletion of groundwater.

Rainfall is measured because it is closely related to groundwater levels and recharge in the case of most aquifers and are fundamental because historic records are scarce in rural areas.

### Who is responsible for measuring rainfall?

Rainfall should be recorded by the Pump Operator or a person who has been instructed on how to do it accurately. Inaccurate rainfall data is useless as it will give us the wrong picture of what is happening to the borehole with groundwater recharge.



# How do we measure rainfall?

Rainfall measurement is a simple process BUT it must be done correctly and accurately for the information to be useful. Rainfall should be measured near every production borehole or for a group of boreholes in the same area.

Measurement can be done with a manual Rain Gauge and rainfall must be read off after each rainfall event. One should use the Log-Sheet Template to capture the rainfall measurements. Date and rainfall amount in mm should be written down on specific sheets (log-sheets) that need to be stored safely

## You will need to take the following steps for using manual rain gauges and also recording the results:

After each rainfall event or at a determined time of day (usually early morning) the measurement should be taken.

- Remove the gauge from the stand/support.
- Hold the rain gauge at eye level.
- Take a reading of the amount of water in the gauge by looking at the markings on the gauge. (These readings are in mm)
- Record the reading on the data sheet provided
- Empty the rain gauge and return it to the support.



## RECOMMENDATIONS

- Ensure that the rain gauge is kept away from buildings and trees, in an open area not far from your boreholes
- The rain gauge should be supported on a pole that is approximately 1m in above the ground. The top (base of the cone) should be kept as flat as possible
- Always make sure the rain gauge is empty after taking a reading.
- Remove any dust and dirt from the cover.



**Water Research Commission**  
Virginia Molose – virginiam@wrc.org.za  
[www.wrc.org.za](http://www.wrc.org.za)

**Association for Water and Rural Development (AWARD)**  
Derick du Toit – derick@award.org.za

**Tsogang Water and Sanitation**  
Kenny Phasha – kennyphasha@tsogang.org

**University of Western Cape**  
Prof Nebo Jovanovic - njovanovic@uwc.ac.za